

DURACELL®


OPTIMUM

OP1500

Size: AA (LR6)

Alkaline-Manganese Dioxide:OPT1 Battery


Zn/OPT1

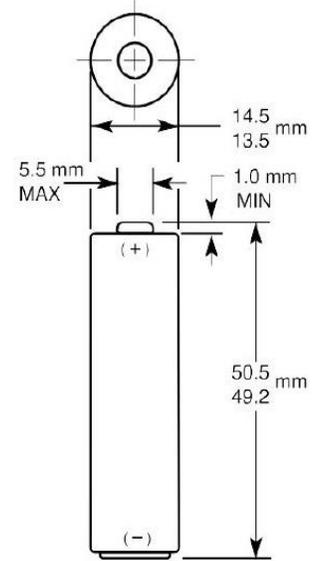


Dimensions shown are IEC standards

| | |
|-----------------------------|--|
| Nominal voltage | 1.5 V |
| Impedance | 75 m-ohm @ 1 kHz |
| Typical weight | 24 g (0.8 oz) |
| Typical volume | 8.4 cm ³ (0.5 in ³) |
| Terminals | Flat |
| Storage temperature range | 5°C to 30°C (41°F to 86°F) |
| Operating temperature range | -20°C to 54°C (-4°F to 130°F) |
| Designation | ANSI: 15A IEC: LR6 |

Optimum AA - Constant Current

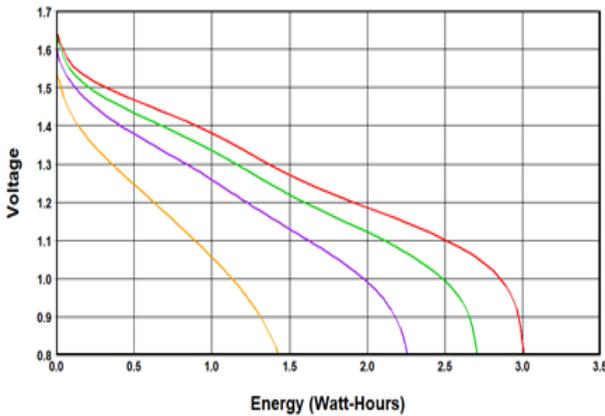

Optimum AA - Constant Power

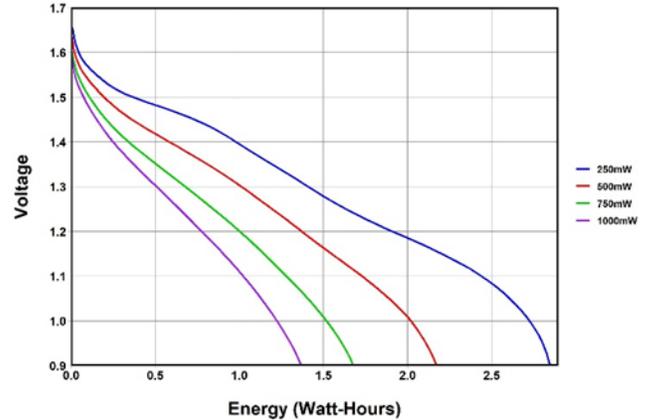



DURACELL®

A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
 www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information.

OP15US0626

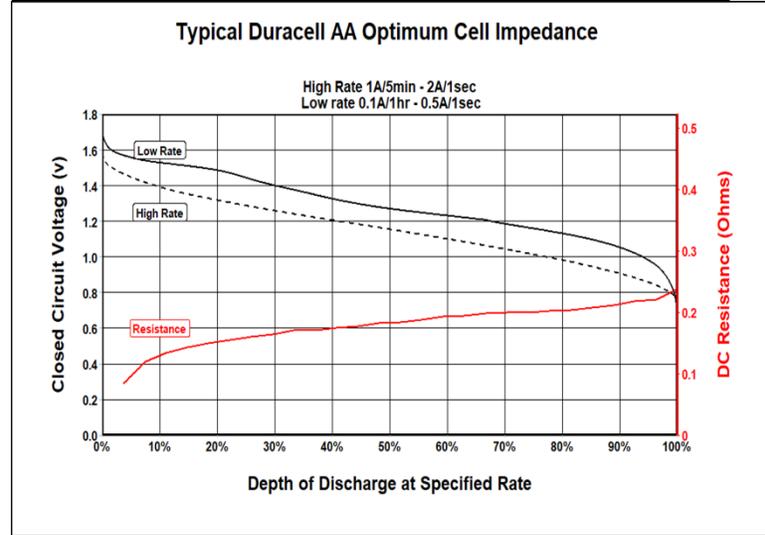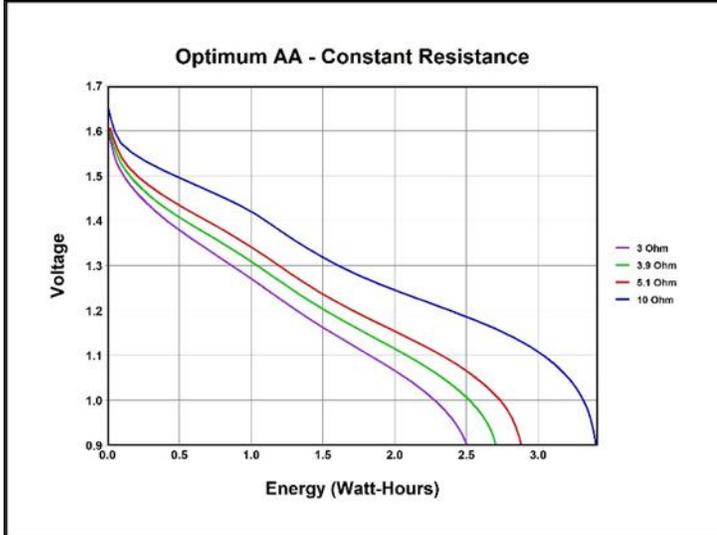

DURACELL[®]

A Berkshire Hathaway Company
 Berkshire Corporate Park
 Bethel, CT. 06801 U.S.A.
 Telephone: Toll-free 1-800-544-5454
www.duracell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.